


James Walker[®]

Solosele[®] KB Hydro – for Kaplan turbine blade roots

- *Cost effective, long-term sealing*
- *Endless or On-Site Joining (OSJ)*
- *Efficient sealing on highly eccentric shafts*
- *Greatly reduces turbine downtime*

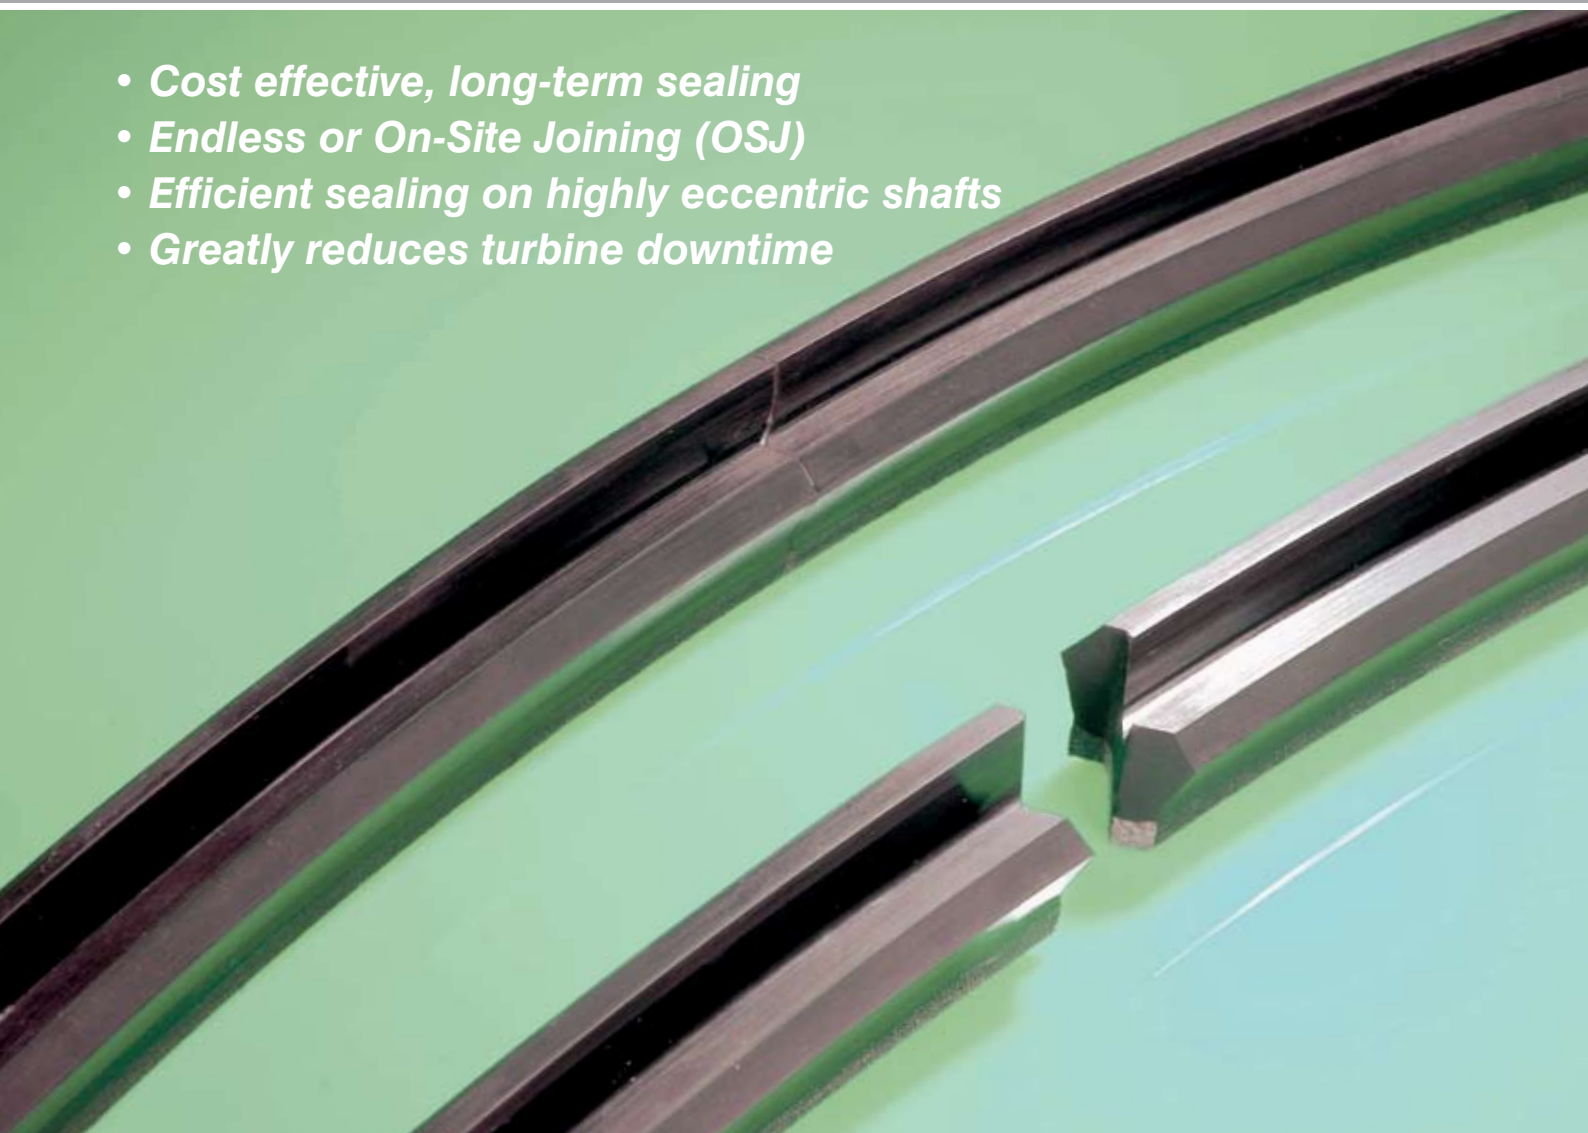

High Performance Sealing Technology



Solosele® KB Hydro

Solosele® KB Hydro is an innovative product developed specifically to seal the blade roots of Kaplan water turbines.

It has operated with great success for many years on turbine blades at hydroelectric schemes around the world — both as an OEM fit and as retrofit on older equipment.

Solosele KB Hydro has out-performed and run significantly longer than many multi-lip seals and other types at these sites.

In operation it:

- Proves very cost effective.
- Has excellent low and high pressure sealing capability under fluctuating conditions.
- Works in a back-to-back arrangement to keep oil in and water out.
- Efficiently seals shafts that run eccentrically on worn bearings.
- Is easy to retrofit using our special On-Site Joining (OSJ) method.
- Significantly reduces turbine downtime and maintenance costs.

We based the design of this new seal on our highly successful Solosele® G single element seal, widely renowned for its compact, robust construction and high integrity sealing under difficult mechanical conditions



Description

Solosele® KB Hydro is a profiled elastomeric seal. It is reinforced at the base with an integral anti-extrusion element of rubber-proofed fabric that is securely mould-bonded to the lip portion.

The anti-extrusion element is sufficiently tough to stop the seal from 'stretching and bunching' when the shaft rotates, yet is remarkably flexible for ease of fitting.

The very short axial length of this seal saves valuable housing space in new equipment. On older equipment with deeper housings, spacer rings can be supplied to move the sealing elements to unworn areas of the shaft.



Operation

A Solosele KB Hydro sealing arrangement typically comprises two seals fitted back-to-back in the blade root housing. This keeps lubricant in the system and prevents the ingress of water and abrasive particles.

When the seal is installed in its housing, the radial squeeze on its elastomeric body provides low pressure sealing suitable for stationary and turbine start-up conditions.

As system pressure rises, the seal responds accordingly to maintain a constant sealing force under fluctuating and reversing pressure differentials (including negative pressure) between the oil and water. In addition, the seal's highly developed profile enables it to overcome high levels of eccentricity or shaft offset caused by bearing wear at the blade root.


Installation

As Solosele KB Hydro does not need axial compression, housing length tolerances can be relaxed and installation becomes a very simple procedure. This is particularly valuable to OEMs when fitting endless-type seals during plant assembly.

On-Site Joining

Days of unnecessary turbine downtime and associated labour costs are saved when you fit Solosele KB Hydro + OSJ®.

Using our special On-Site Joining (OSJ) method, the split single-element Solosele KB Hydro is efficiently joined to form an endless seal around a shaft. Our method gives you the performance of a fully moulded seal with the maintenance benefits of a split seal — at best value price.

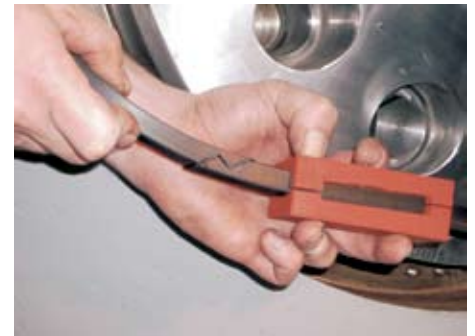

We have developed this system to help customers who want a simple yet highly efficient seal that can be fitted swiftly and easily on site without removing the blade. Before Solosele KB Hydro + OSJ®, the only answer was to use an expensive split multi-lip seal that demands great skill in fitting to obtain effective results.

Training for On-Site Joining


Successful application of the Solosele KB Hydro + OSJ® method relies on careful adherence to all stages of the joining process.

This process is described step-by-step in the detailed fitting instructions supplied with each seal kit.

However, we recommend that first-time users attend one of our hands-on training sessions. These can be carried out on-site or at any of our premises worldwide.

Solosele® KB Hydro

Housing & seal configuration

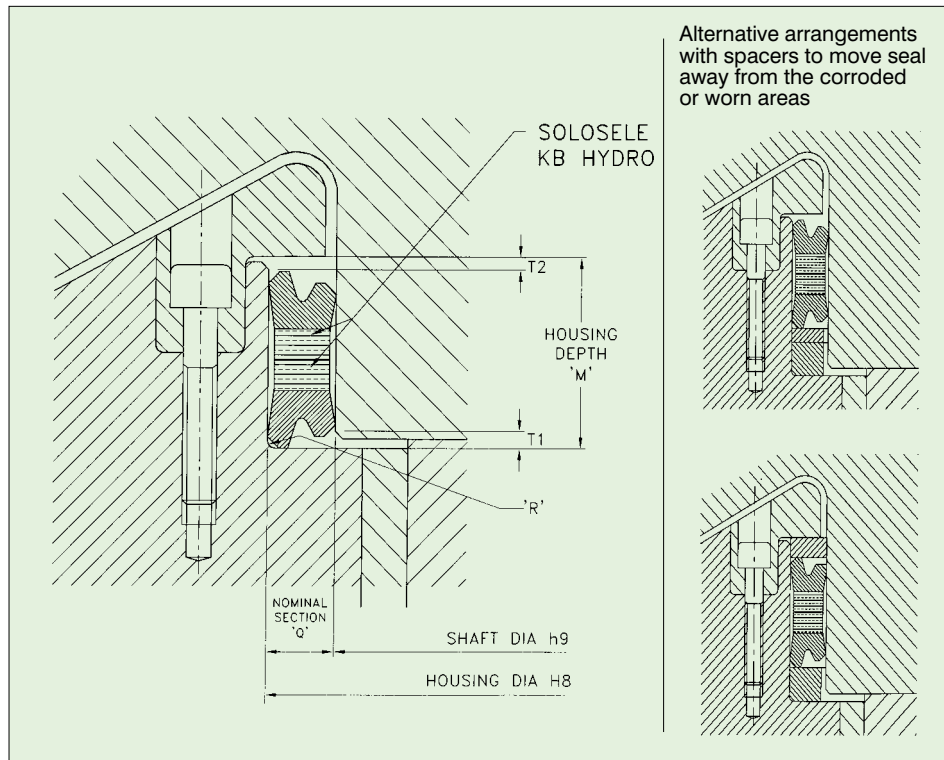

Seal availability

Solosele® KB Hydro is supplied in a number of formats:

- Endless seals that are ideal for OEM installation.
- Split seals with OSJ (On-Site Joining) kits for retrofitting.
- In a range of radial sections to suit Kaplan blade root housings.

Materials

We recommend our medium nitrile (NBR) elastomer for normal blade root sealing applications. This material has excellent resistance to all types of oil and is suitable for the temperature ranges encountered by virtually all Kaplan water turbines.

Sizes & housing details

Solosele KB Hydro is readily available in a range of radial sections and diameters. The 'Recommended dimensions' chart on this page shows the ratio of seal section to maximum diameter that we recommend.

Other section to diameter ratios can be accommodated, so if the seal dimensions you require are not listed, please consult your local James Walker company or distributor.

Recommended dimensions

Nominal housing section 'Q' (Seal section)	Tolerance on housing section 'Q'	Maximum shaft diameter 'h9' (See 'Sizes & housing details')	Lead-in chamfer depth		Minimum housing depth 'M' (Without spacer rings)	'R' max
			'T1' max	'T2' max		
mm	mm	mm	mm	mm	mm	mm
10	+0.58 -0.44	575	3.0	2.4	24	1.6
12.5	+0.69 -0.53	700	4.0	3.0	31	2.0
16	+0.81 -0.66	900	5.0	4.0	40	2.5
19	+1.01 -0.80	1100	6.0	4.5	47	3.0
25	+1.21 -0.96	Consult James Walker	8.0	6.0	64	4.0

Specification & ordering

Please quote **James Walker Solosele® KB Hydro**, and the following (in mm):

- Seal inside diameter (ie, shaft diameter 'h9')
- Nominal housing section 'Q' (ie, seal section)
- Total housing depth 'M'.
- Also note any special considerations concerning your application.

Then contact your local James Walker company or distributor. They will provide expert technical advice, and are more than willing to discuss the exact details of your application before you place an order.

James Walker Group worldwide

James Walker Australia

Tel: +61 (0)2 9644 9755
 Fax: +61 (0)2 9645 2009
 Email: sales.au@jameswalker.biz

James Walker Benelux (Belgium)

Tel: +32 3 820 7900
 Fax: +32 3 828 5484
 Email: sales.be@jameswalker.biz

(Netherlands)

Tel: +31 (0)186 633111
 Fax: +31 (0)186 633110
 Email: sales.nl@jameswalker.biz

James Walker China

Tel: +86 21 5117 5802
 Fax: +86 21 5116 6899
 Email: sales.cn@jameswalker.biz

James Walker Deutschland

Tel: +49 (0)40 386 0810
 Fax: +49 (0)40 389 3230
 Email: sales.de@jameswalker.biz

James Walker France

Tel: +33 (0)437 497 480
 Fax: +33 (0)437 497 483
 Email: sales.fr@jameswalker.biz

James Walker Iberica

Tel: +34 94 447 0099
 Fax: +34 94 447 1077
 Email: sales.es@jameswalker.biz

James Walker Ireland

Tel: +353 (0)21 432 3626
 Fax: +353 (0)21 432 3623
 Email: sales.ie@jameswalker.biz

James Walker Italiana

Tel: +39 02 257 8308
 Fax: +39 02 263 00487
 Email: sales.it@jameswalker.biz

James Walker Mfg (USA)

Tel: +1 708 754 4020
 Fax: +1 708 754 4058
 Email: helpdesk1@jameswalker.biz

James Walker New Zealand

Tel: +64 (0)9 272 1599
 Fax: +64 (0)9 272 3061
 Email: sales.nz@jameswalker.biz

James Walker Norge

Tel: +47 22 706800
 Fax: +47 22 706801
 Email: sales.no@jameswalker.biz

James Walker Oil & Gas (USA)

Tel: +1 281 875 0002
 Fax: +1 281 875 0188
 Email: oilandgas@jameswalker.biz


James Walker Singapore

Tel: +65 6777 9896
 Fax: +65 6777 6102
 Email: sales.sg@jameswalker.biz


James Walker South Africa

Tel: +27 (0)31 205 6251/2/3
 Fax: +27 (0)31 205 6266
 Email: sales.za@jameswalker.biz

Please ask your local James Walker company for your copy of these free guides.
 Many of these guides can also be downloaded in pdf form from our website www.jameswalker.biz.




Hydrosele®



Hydropower Industry
Guide




Rotabolt®



Walkersele® OSJ-2



Hydraulic Seals



Compression Packings

James Walker & Co Ltd

Power Generation Team
 1 Millennium Gate, Westmere Drive
 Crewe, Cheshire CW1 6AY, UK

Tel: +44 (0)1270 536000
 Fax: +44 (0)1270 536100
 Email: csc@jameswalker.biz
www.jameswalker.biz

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but because of factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to such information. Specifications are subject to change without notice. Statements of operating limits quoted in this publication are not an indication that these values can be applied simultaneously. Material Safety Data Sheets (MSDS) are available on request.



CERTIFICATE No. FM 01269
 BS EN ISO 9001:2000