

Tube Test Seals

- *High pressure capability*
- *Extreme wear resistance*
- *Special lip profile for maximum seal life*
- *Manufactured from high tensile impact resistant polyurethane*
- *Colour coded for different test regimes*



Tube Test Seals

High performance fully moulded seals for pipeline applications

Tube testing machines need to repeatedly seal and release the steel tube ends as part of the hydrostatic testing process. The quality of the seals employed is therefore a crucial factor in the reliability of these machines, and James Walker Flemings tube test seals offer the highest levels of performance.

Manufactured from high tensile, impact resistant polyurethane, they provide excellent wear resistance and can operate at low or high pressures.

Their unique design incorporates a special lip profile to enable tube entry without seal damage.

Extreme wear resistance


James Walker Flemings tube test seals have an enviable record for reliability. They offer a high degree of wear resistance, helped by a special lip profile designed for maximum seal life.

High pressure capability

Designed for the testing of thick-walled high pressure rated steel tube, these custom designed parts are regularly used to seal pressures well in excess of 1000 bar.

Colour coding

Available in a range of colours, they can be colour coded to match test heads or to indicate pressure rating.

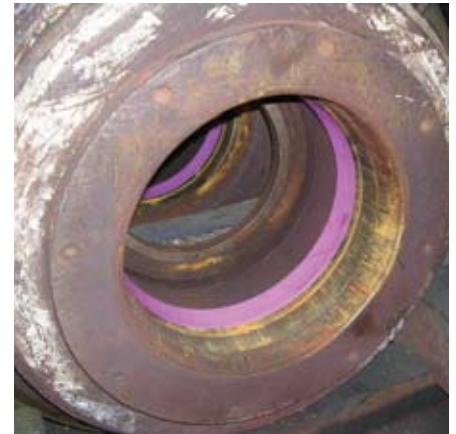


Dual hardness versions

Tube test seals are also available with dual hardnesses. These offer an even longer working life and improved extrusion resistance under demanding mechanical conditions.



End face seals

Also available are end face seals within the sealing head. This use involves a horizontal Solosele® seal with a moulded-in anti-extrusion spring. The split halves of the sealing head are held together by two fasteners using RotaBolt® safety bolts.

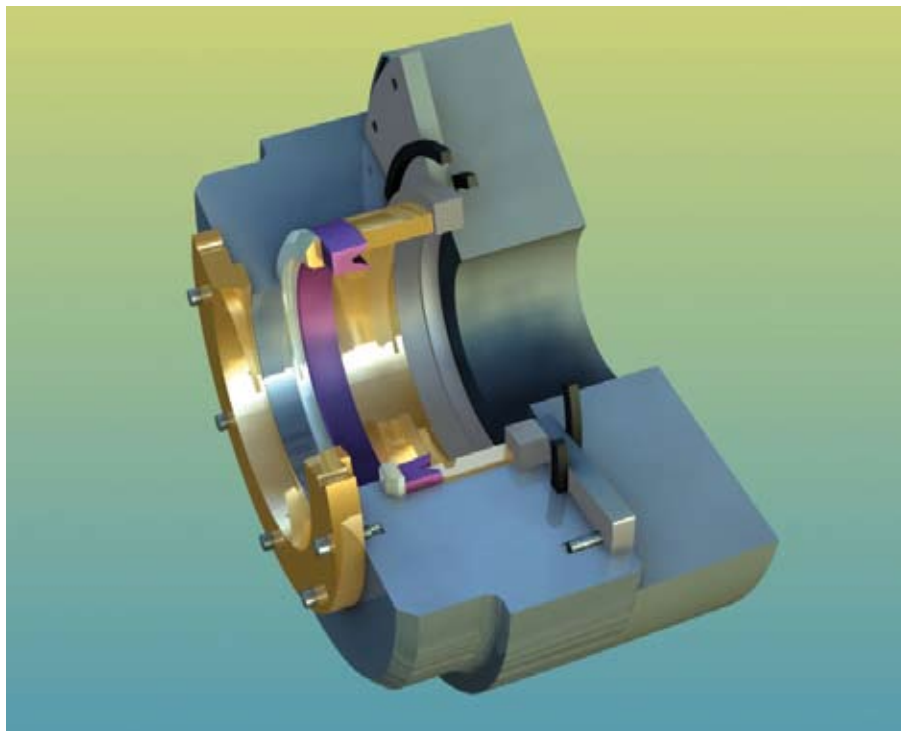

James Walker Flemings
Atlas Mill Road, Brighouse,
West Yorkshire, HD6 1ES,
United Kingdom
Tel: +44 (0) 1484 718391
Fax: +44 (0) 1484 711585
Email: sales@flemings-seals.co.uk
www.jameswalker.biz/Flemings

James Walker & Co Ltd
Customer Support Centre
1 Millennium Gate, Westmere Drive
Crewe, CW1 6AY
Tel + 44 (0)1270 536000.
Fax + 44 (0)1270 536100
E-mail csc@jameswalker.biz

Information in this publication and otherwise supplied to users is based on our general experience and is given in good faith, but because of factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to such information. Specifications are subject to change without notice. Statements of operating limits quoted in this publication are not an indication that these values can be applied simultaneously. Material Safety Data Sheets (MSDS) are available on request.



CERTIFICATE No. GB05/64983
ISO9001:2000

www.jameswalker.biz