


# HORIZONTAL • COMMERCIAL VANGUARD™ 5,5 - 6,5 GROSS HP\*



<b>ENGINE TYPE</b>	SINGLE CYLINDER, 4-STROKE, AIR COOLED, OHV (OVERHEAD VALVE)	
<b>MODEL NUMBER</b>	13L1	13L3
<b>GROSS POWER (HP(KW/NM)) @ 3'600 RPM</b>	5,5* [4,10/10,88]	6,5* [4,85/12,86]
<b>DISPLACEMENT (CC)</b>	205	
<b>CYLINDER</b>	CAST IRON SLEEVE	
<b>BORE &amp; STROKE (MM)</b>	68,3 X 55,8	
<b>FUEL TANK CAPACITY (L)</b>	3,3	
<b>OIL CAPACITY (L)</b>	0,6	
<b>DRY WEIGHT (KG)</b>	18,7	
<b>DIMENSIONS L X W X H (MM)</b>	275 X 391 X 363	
<b>FEATURES</b>	TRANSPORTGUARD™, DUAL BALL BEARING	
<b>OPTIONAL</b>	SUPER LO-TONE™ MUFFLER, ELECTRIC START, LOW OIL SENSOR	

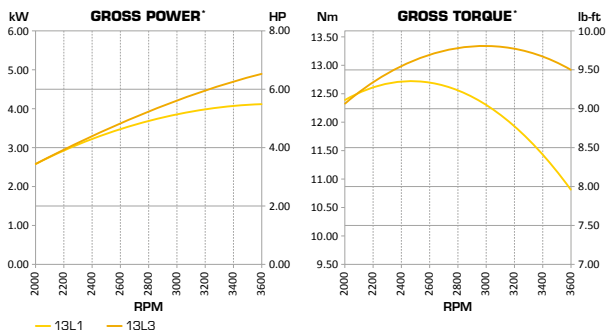

## FUEL CONSUMPTION IN LITRES PER HOUR\*\*

FULL LOAD:	13L1	13L3
LITRES:	2,02	2,36

\* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton. All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

\*\* (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.