


PERFORMANCE • SMALL VERTICAL 750EX SERIES™ DOV®



ENGINE TYPE	SINGLE CYLINDER, 4-STROKE, AIR COOLED, DOV® (DIRECT OVERHEAD VALVE)
MODEL NUMBER	1006
GROSS TORQUE (NM) @ 2'600 RPM	9,49*
DISPLACEMENT (CC)	161
CYLINDER	ALUMINIUM
BORE & STROKE (MM)	64,0 X 50,0
FUEL TANK CAPACITY (L)	1,0
OIL CAPACITY (L)	0,6
DRY WEIGHT (KG)	11,1
DIMENSIONS L X W X H (MM)	369 X 325 X 254
FEATURES	MECHANICAL GOVERNOR, READYSTART®, S2 START GUARANTEE®
OPTIONAL	ELECTRIC START

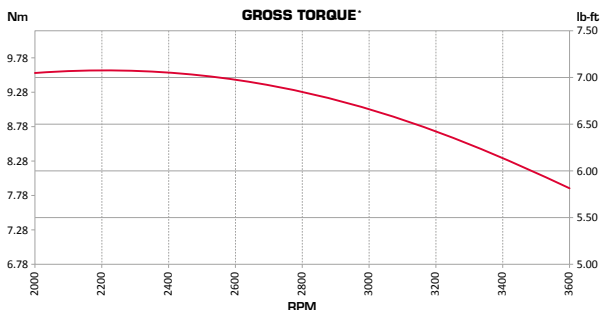

FUEL CONSUMPTION IN LITRES PER HOUR**

LOAD:	FULL	75%	50%	25%
LITRES:	1,28	1,09	0,83	0,60

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

**Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.