


LARGE VERTICAL • COMMERCIAL VANGUARD™ 21 - 23 GROSS HP*



ENGINE TYPE	V-TWIN, 4-STROKE, AIR COOLED, OHV (OVERHEAD VALVE)	
MODEL NUMBER	3857	3867
GROSS POWER (HP(KW/NM)) @ 3'600 RPM	21,0* [15,67/41,54]	23,0* [17,16/45,50]
DISPLACEMENT (CC)	627	
CYLINDER	CAST IRON SLEEVE	
BORE & STROKE (MM)	75,5 X 70,0	
FUEL TANK CAPACITY (L)	NA	
OIL CAPACITY (L)	1,7	
DRY WEIGHT (KG)	35	
DIMENSIONS L X W X H (MM)	443 X 406 X 344	
FEATURES	OIL FILTER, FULL PRESSURE LUBRICATION	
OPTIONAL	ELECTRONIC FUEL MANAGEMENT (EFM)	

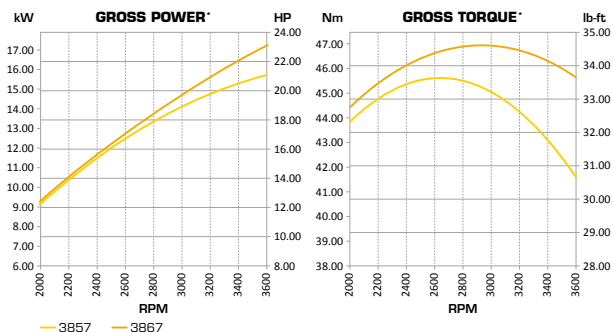

FUEL CONSUMPTION IN LITRES PER HOUR**

LOAD: FULL
LITRES: 6,7

* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton. All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.