


COMMERCIAL • LARGE VERTICAL VANGUARD™ 24 - 26 GROSS HP*



ENGINE TYPE	V-TWIN, 4-STROKE, AIR COOLED, OHV (OVERHEAD VALVE)	
MODEL NUMBER	49V6	49R9
GROSS POWER (HP(KW/NM)) @ 3'600 RPM	24,0* [17,90/47,48]	26,0* [19,40/51,43]
DISPLACEMENT (CC)	810	
CYLINDER	CAST IRON SLEEVE	
BORE & STROKE (MM)	83,8 X 73,4	
FUEL TANK CAPACITY (L)	NA	
OIL CAPACITY (L)	1,98	
DRY WEIGHT (KG)	40,5	
DIMENSIONS L X W X H (MM)	505 X 462 X 582	
FEATURES	OIL FILTER, FULL PRESSURE LUBRICATION, DONALDSON CYCLONIC AIR CLEANER	

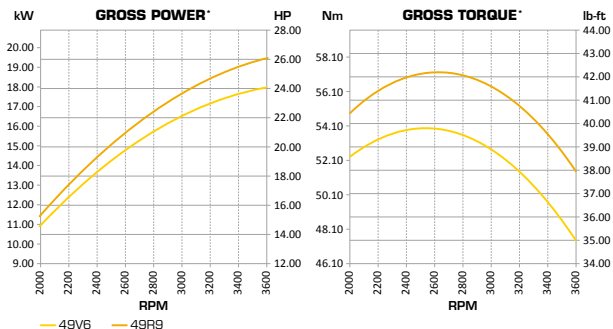

FUEL CONSUMPTION IN LITRES PER HOUR**

FULL LOAD:	49V6	49R9
LITRES:	8,55	9,16

* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton. All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.

LARGE VERTICAL • VANGUARD™ • LARGE VERTICAL