




Engine type	Single cylinder, 4-stroke, air-cooled, OHV (Overhead Valve)
Model Number	10R2
Gross Torque (Nm) @ 2'600 rpm	10,17*
Displacement (cc)	163
Cylinder	Cast Iron sleeve
Bore & Stroke (mm)	68,0 x 45,0
Fuel tank capacity (l)	3,0
Oil capacity (l)	0,6
Dry weight (kg)	15,0
Dimensions L x W x H (mm)	291 x 368 x 330
Features	Lo-Tone™ muffler, dual ball bearing
Optional	30 and 60 Watt alternator available, oil bath air cleaner

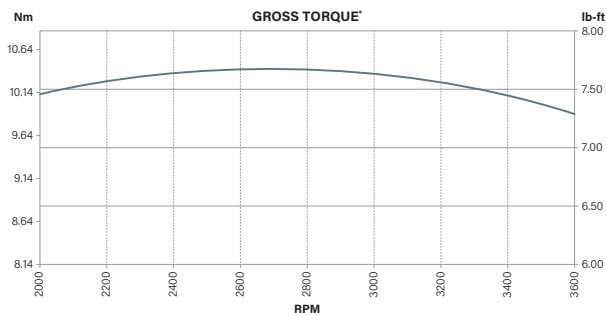

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 1,38

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

** (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.