

PRODUCTION STOPS  
DECEMBER 2018

COMMERCIAL · HORIZONTAL  
**VANGUARD™ 4,10 -4,85 GROSS kW\***




**TRANSPORT  
GUARD™**



HORIZONTAL · VANGUARD™ · HORIZONTAL

<b>Engine type</b>	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)	
<b>Model number</b>	13L1	<b>13L3</b>
<b>Gross power kW (HP) @ 3'600 rpm</b>	4,10* (5,5)	<b>4,85* (6,5)</b>
<b>Displacement (cc)</b>	205	
<b>Cylinder</b>	Cast Iron sleeve	
<b>Bore &amp; Stroke (mm)</b>	68,3 x 55,9	
<b>Fuel tank capacity (l)</b>	3,3	
<b>Oil capacity (l)</b>	0,6	
<b>Dry weight (kg)</b>	18,7	
<b>Dimensions L x W x H (mm)</b>	275 x 391 x 363	
<b>Features</b>	TransportGuard™, dual ball bearing	
<b>Optional</b>	Super Lo-Tone™ muffler, electric start, low oil sensor	

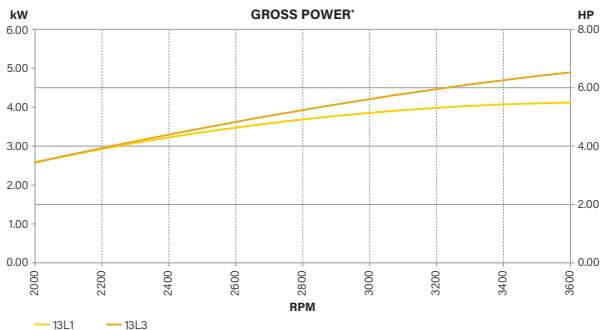

\* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton.