

PRODUCTION STOPS
DECEMBER 2018

COMMERCIAL · HORIZONTAL
VANGUARD™ 4,10 -4,85 GROSS kW*




**TRANSPORT
GUARD™**



HORIZONTAL · VANGUARD™ · HORIZONTAL

Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)	
Model number	13L1	13L3
Gross power kW (HP) @ 3'600 rpm	4,10* (5,5)	4,85* (6,5)
Displacement (cc)	205	
Cylinder	Cast Iron sleeve	
Bore & Stroke (mm)	68,3 x 55,9	
Fuel tank capacity (l)	3,3	
Oil capacity (l)	0,6	
Dry weight (kg)	18,7	
Dimensions L x W x H (mm)	275 x 391 x 363	
Features	TransportGuard™, dual ball bearing	
Optional	Super Lo-Tone™ muffler, electric start, low oil sensor	

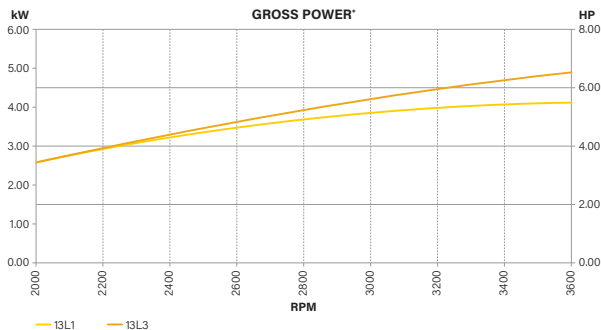

* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton.