

COMMERCIAL · HORIZONTAL  
**VANGUARD™ 5,97 - 7,46 GROSS kW\***


HORIZONTAL · VANGUARD™ · HORIZONTAL



**TRANSPORT  
 GUARD™**



<b>Engine type</b>	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)	
<b>Model number</b>	19L1	<b>19L2</b>
<b>Gross power kW (HP) @ 3'600 rpm</b>	5,97* (8,0)	<b>7,46* (10,0)</b>
<b>Displacement (cc)</b>	305	
<b>Cylinder</b>	Cast Iron sleeve	
<b>Bore &amp; Stroke (mm)</b>	79,2 x 61,9	
<b>Fuel tank capacity (l)</b>	3,6	
<b>Oil capacity (l)</b>	0,8	
<b>Dry weight (kg)</b>	25,9	
<b>Dimensions L x W x H (mm)</b>	318 x 421 x 406	
<b>Features</b>	TransportGuard™, dual ball bearing, Super Lo-Tone™ muffler	
<b>Optional</b>	Electric start, low oil sensor	

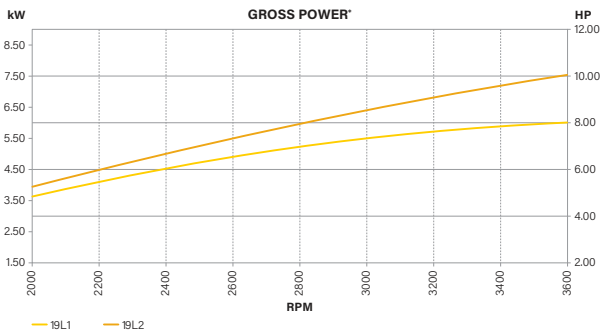

\* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton.