




Engine type	Single cylinder, 4-stroke, air-cooled, OHV (Overhead Valve)
Model number	25T2
Gross Torque (Nm) @ 2'600 rpm	28,48*
Displacement (cc)	420
Cylinder	Cast Iron sleeve
Bore & Stroke (mm)	90,0 x 66,0
Fuel tank capacity (l)	6,6
Oil capacity (l)	1,1
Dry weight (kg)	31,0
Dimensions L x W x H (mm)	499 x 370 x 443
Features	Lo-Tone™ muffler, dual ball bearing, forged Iron crankshaft
Optional	Electric start

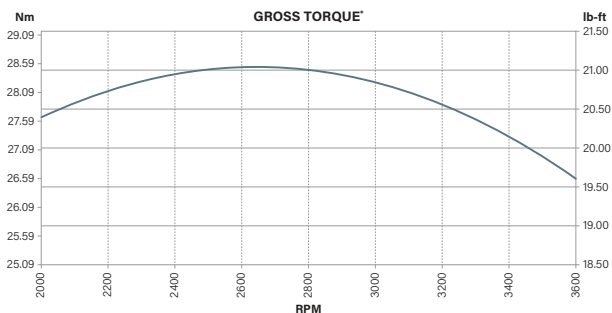

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 3,58

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.