




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
Model number	09P7
Gross Torque (Nm) @ 2'600 rpm	7,46*
Displacement (cc)	140
Cylinder	Aluminium
Bore & Stroke (mm)	63,4 x 44,5
Fuel tank capacity (l)	0,8
Oil capacity (l)	0,47
Dry weight (kg)	8,2
Dimensions L x W x H (mm)	347 x 310 x 244
Features	Mechanical governor, ReadyStart®, S2 Start Guarantee®, paper air filter, Super Lo-Tone™ muffler, extended oil fill
Optional	Mow N'Stow® package (see page 20)
Cover option	XT cover

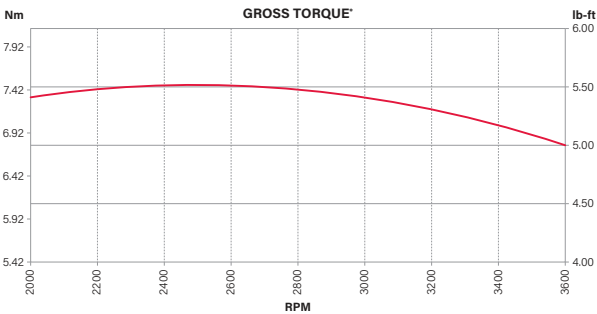

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 1,02

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.  
 \*\* (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.