


SMALL VERTICAL • PERFORMANCE
750EX SERIES™ I/C® DOV®

PERFORMANCE • SMALL VERTICAL • PERFORMANCE



Engine type	Single cylinder, 4-stroke, air cooled, DOV® (Direct Overhead Valve)
Model number	1008
Gross Torque (Nm) @ 2'600 rpm	9,49*
Displacement (cc)	161
Cylinder	Cast Iron sleeve
Bore & Stroke (mm)	64,0 x 50,0
Fuel tank capacity (l)	1,0
Oil capacity (l)	0,6
Dry weight (kg)	11,1
Dimensions L x W x H (mm)	369 x 325 x 254
Features	Mechanical governor, ReadyStart®, S2 Start Guarantee®
Optional	Electric start

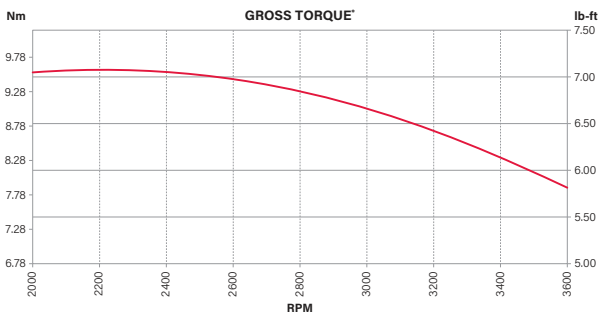

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 1,26

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.