




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
Model number	104M
Gross Torque (Nm) @ 2'600 rpm	9,83*
Displacement (cc)	163
Cylinder	Aluminium
Bore & Stroke (mm)	68,3 x 44,5
Fuel tank capacity (l)	1,0
Oil capacity (l)	0,47
Dry weight (kg)	8,5
Dimensions L x W x H (mm)	349 x 314 x 253
Features	Mechanical governor, Just Check and Add™, ReadyStart®, S2 Start Guarantee®, paper air filter, Super Lo-Tone™ muffler, high oil fill
Optional	Mow N'Stow® package (see page 20), manual choke
Cover options	LL insert, XXM cover for adjustable rewind (see page 24)

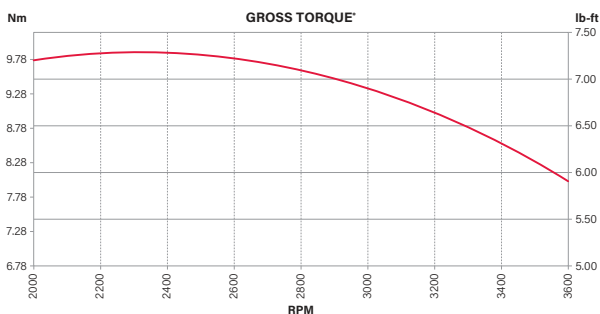

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 1,25

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

\*\* (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.