




| | |
|-------------------------------|---|
| Engine type | Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve) |
| Model number | 125P |
| Gross Torque (Nm) @ 2'600 rpm | 11,87* |
| Displacement (cc) | 190 |
| Cylinder | Aluminium |
| Bore & Stroke (mm) | 68,3 x 51,8 |
| Fuel tank capacity (l) | 1,0 |
| Oil capacity (l) | 0,6 |
| Dry weight (kg) | 10,0 |
| Dimensions L x W x H (mm) | 399 x 338 x 238 |
| Features | Mechanical governor, Just Check and Add™, ReadyStart®, S2 Start Guarantee®, paper air filter, Super Lo-Tone™ muffler, high oil fill |
| Optional | Oil filter |

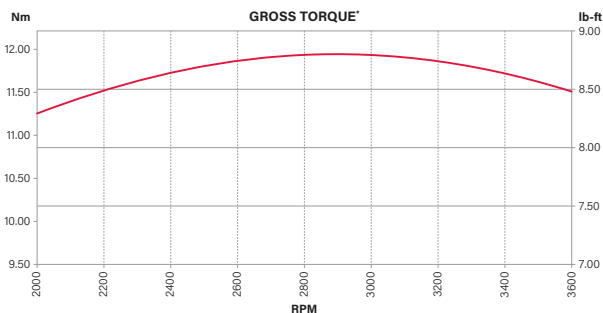

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 1,34

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.