


SMALL VERTICAL • PREMIUM
950E SERIES™

PREMIUM • SMALL VERTICAL • PREMIUM



Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
Model number	14B9
Gross Torque (Nm) @ 2'600 rpm	13,56*
Displacement (cc)	223
Cylinder	Aluminium
Bore & Stroke (mm)	74,0 x 54,0
Fuel tank capacity (l)	1,1
Oil capacity (l)	0,6
Dry weight (kg)	14,2
Dimensions L x W x H (mm)	401 x 339 x 257
Features	ReadyStart®, S2 Start Guarantee®, paper air filter, Super Lo-Tone™ muffler, 0,5 Amp alternator
Optional	Rewind start

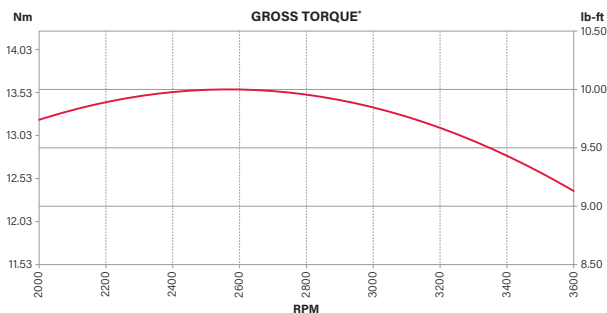

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 1,76

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

** (Load @ 2'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.