


LARGE VERTICAL • STANDARD  
**SERIES 3 POWERBUILT™**

STANDARD • LARGE VERTICAL • STANDARD



|                               |  |        |        |               |
|-------------------------------|--|--------|--------|---------------|
| Engine type                   | Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)          |        |        |               |
| Model number                  | 21R5   | 21R6   | 21R7   | <b>21R8</b>   |
| Series number                 | 3105   | 3115   | 3125   | <b>3130</b>   |
| Gross Torque (Nm) @ 3'600 rpm | 16,82*   | 18,79* | 20,77* | <b>22,75*</b> |
| Displacement (cc)             | 344  |        |        |               |
| Cylinder                      | Cast Iron sleeve   |        |        |               |
| Bore & Stroke (mm)            | 87,3 x 57,5  |        |        |               |
| Fuel tank capacity (l)        | 2,6 (optional)   |        |        |               |
| Oil capacity (l)              | 1,4  |        |        |               |
| Dry weight (kg)               | 26,8   |        |        |               |
| Dimensions L x W x H (mm)     | 452 x 393 x 327  |        |        |               |
| Features                      | AVS®, DuraLube   |        |        |               |
| Optional                      | Muffler, ReadyStart®, rewind start, Electronic Fuel Management (EFM) |        |        |               |

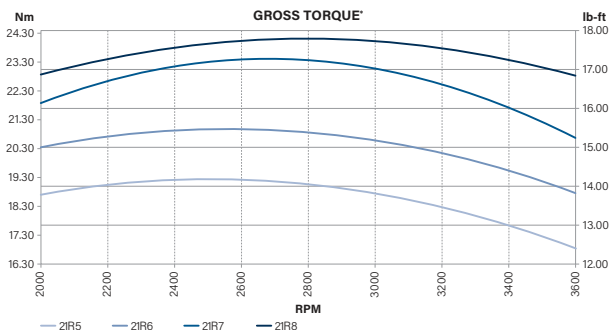

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 3,85 (average)

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

\*\* (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.