




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)
Model number	21R8
Series number	3130
Gross Torque (Nm) @ 3'600 rpm	22,75*
Displacement (cc)	344
Cylinder	Cast Iron sleeve
Bore & Stroke (mm)	87,3 x 57,5
Fuel tank capacity (l)	2,6 (optional)
Oil capacity (l)	1,4
Dry weight (kg)	26.8
Dimensions L x W x H (mm)	452 x 393 x 327
Features	AVS®, DuraLube, oil filter, pressure lubrication
Optional	Muffler, ReadyStart®, Electronic Fuel Management (EFM)

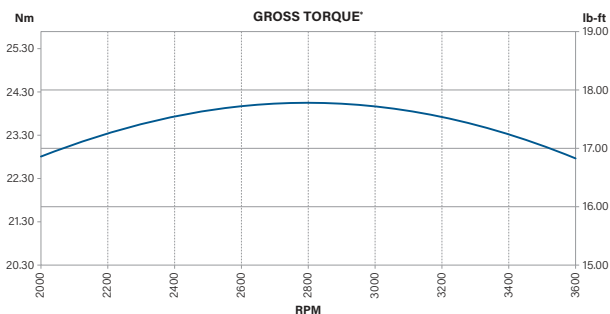

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 3,78

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.