


LARGE VERTICAL • STANDARD  
**SERIES 3 POWERBUILT™**

STANDARD • LARGE VERTICAL • STANDARD



Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)			
Model number	21R5	21R6	21R7	<b>21R8</b>
Series number	3105	3115	3125	<b>3130</b>
Gross Torque (Nm) @ 3'600 rpm	16,82*	18,79*	20,77*	<b>22,75*</b>
Displacement (cc)	344			
Cylinder	Cast Iron sleeve			
Bore & Stroke (mm)	87,3 x 57,5			
Fuel tank capacity (l)	2,6 (optional)			
Oil capacity (l)	1,4			
Dry weight (kg)	26,8			
Dimensions L x W x H (mm)	452 x 393 x 327			
Features	AVS®, DuraLube			
Optional	Muffler, ReadyStart®, rewind start, Electronic Fuel Management (EFM)			

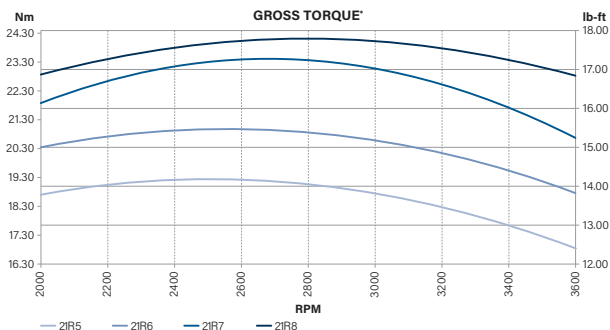

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 3,85 (average)

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.

\*\* (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.