




<b>Engine type</b>	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)
<b>Model number</b>	3057
<b>Gross power kW (HP) @ 3'600 rpm</b>	<b>11,94*</b> <b>(16,0)</b>
<b>Displacement (cc)</b>	479
<b>Cylinder</b>	Cast Iron sleeve
<b>Bore &amp; Stroke (mm)</b>	68,0 x 66,0
<b>Fuel tank capacity (l)</b>	NA
<b>Oil capacity (l)</b>	1,7
<b>Dry weight (kg)</b>	32,4
<b>Dimensions L x W x H (mm)</b>	429 x 404 x 310
<b>Features</b>	Oil filter, full pressure lubrication
<b>Optional</b>	Rewind start

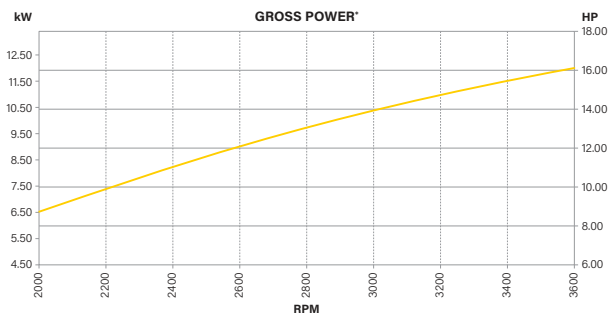

\* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton.