




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)				
Model number	31Q5	31R5	31R6	31R7	<b>31R8</b>
Series number	4145	4155	4165	4175	<b>4185</b>
Gross Torque (Nm) @ 3'600 rpm	24,73*	26,71*	28,68*	30,66*	<b>32,64*</b>
Displacement (cc)	500				
Cylinder	Cast Iron sleeve				
Bore & Stroke (mm)	90,5 x 77,8				
Fuel tank capacity (l)	NA				
Oil capacity (l)	1,4				
Dry weight (kg)	29,5				
Dimensions L x W x H (mm)	479 x 393 x 327				
Features	AVS®, DuraLube				
Optional	Muffler, ReadyStart®, rewind start, Electronic Fuel Management (EFM)				

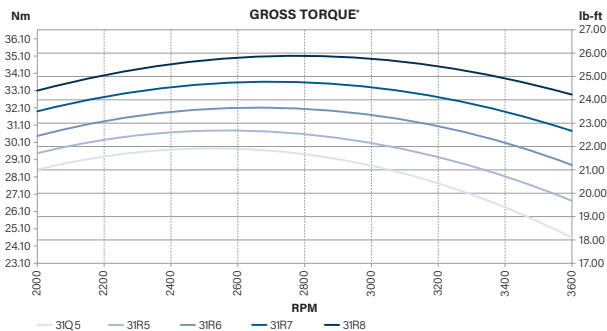

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 5,28 (average)

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.  
 \*\* (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.