




Engine type	Single cylinder, 4-stroke, air cooled, OHV (Overhead Valve)		
Model number	31R7	31R8	31R9
Series number	4175	4185	4195
Gross Torque (Nm) @ 3'600 rpm	30,66*	32,64*	34,62*
Displacement (cc)	500		
Cylinder	Cast Iron sleeve		
Bore & Stroke (mm)	90,5 x 77,8		
Fuel tank capacity (l)	NA		
Oil capacity (l)	1,4		
Dry weight (kg)	29,5		
Dimensions L x W x H (mm)	479 x 393 x 327		
Features	AVS®, DuraLube, oil filter, pressure lubrication		
Optional	Muffler, ReadyStart®, Electronic Fuel Management (EFM)		

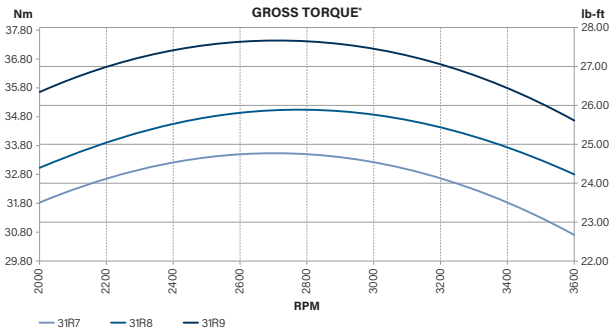

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 5,51 (average)

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.