




Engine type	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)			
Model number	40R5	40R6	40N7	40N8
Series number	7160	7180	7200	7220
Gross Torque (Nm) @ 3'600 rpm	27,70*	31,65*	35,61*	39,57*
Displacement (cc)	656			
Cylinder	Cast Iron sleeve			
Bore & Stroke (mm)	75,4 x 73,4			
Fuel tank capacity (l)	NA			
Oil capacity (l)	1,9			
Dry weight (kg)	36,8			
Dimensions L x W x H (mm)	484 x 462 x 363			
Features	Oil filter, full pressure lubrication			
Optional	ReadyStart®, Electronic Fuel Management (EFM)			

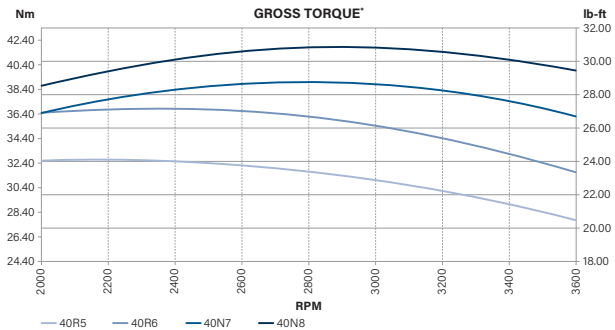

**Fuel Consumption in Litres per Hour\*\***

Load: Full  
 Litres: 6,95 (average)

\*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.  
 \*\* (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.