


LARGE VERTICAL • PREMIUM
SERIES 7 PROFESSIONAL SERIES™

PREMIUM • LARGE VERTICAL • PREMIUM



Engine type	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)	
Model number	40U7	40U8
Series number	7200	7220
Gross Torque (Nm) @ 3'600 rpm	35,61*	39,57*
Displacement (cc)	656	
Cylinder	Cast Iron sleeve	
Bore & Stroke (mm)	75,4 x 73,4	
Fuel tank capacity (l)	NA	
Oil capacity (l)	1,9	
Dry weight (kg)	36,8	
Dimensions L x W x H (mm)	484 x 462 x 363	
Features	Oil filter, full pressure lubrication	
Optional	ReadyStart®, Electronic Fuel Management (EFM)	

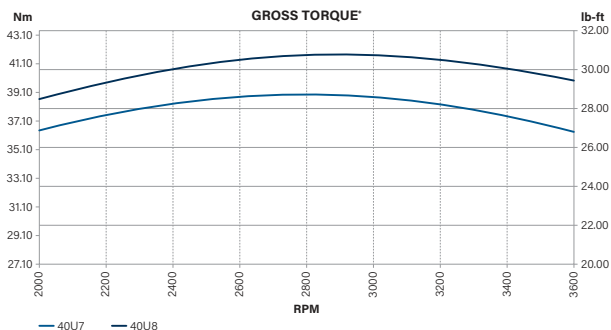

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 7,23 (average)

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.