


LARGE VERTICAL • PREMIUM
SERIES 8 COMMERCIAL SERIES™

PREMIUM • LARGE VERTICAL • PREMIUM



Engine type	V-Twin, 4-stroke, air-cooled, OHV (Overhead Valve)
Model number	44C8
Series number	8270
Gross Torque (Nm) @ 3'600 rpm	47,48*
Displacement (cc)	724
Cylinder	Cast Iron sleeve
Bore & Stroke (mm)	79,2 x 73,4
Fuel tank capacity (l)	NA
Oil capacity (l)	1,9
Dry weight (kg)	38,1
Dimensions L x W x H (mm)	490 x 462 x 399
Features	Integrated cyclonic air filter, oil filter, full pressure lubrication
Optional	Electronic fuel management (EFM)

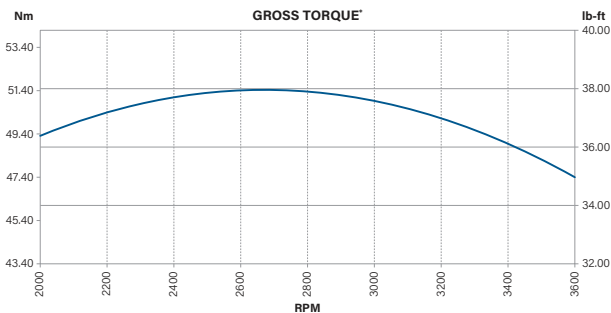

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 8,10

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.