


PREMIUM • LARGE VERTICAL
SERIES 8 PROFESSIONAL SERIES™

PREMIUM • LARGE VERTICAL • PREMIUM



Engine type	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)		
Model number	44U5	44U6	44U8
Series number	8230	8240	8270
Gross Torque (Nm) @ 3'600 rpm	41,54*	43,52*	47,48*
Displacement (cc)	724		
Cylinder	Cast Iron sleeve		
Bore & Stroke (mm)	79,2 x 73,4		
Fuel tank capacity (l)	NA		
Oil capacity (l)	1,9		
Dry weight (kg)	36,8		
Dimensions L x W x H (mm)	484 x 462 x 363		
Features	Oil filter, full pressure lubrication		
Optional	ReadyStart®, Electronic Fuel Management (EFM)		

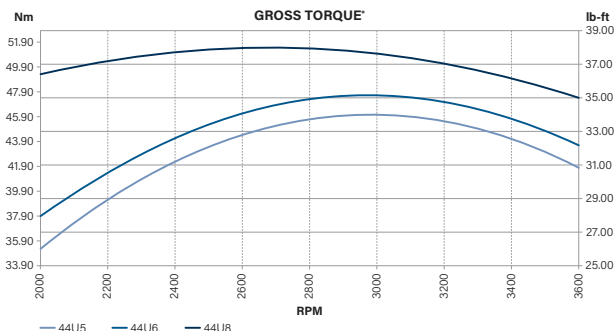

Fuel Consumption in Litres per Hour**

Load: Full
 Litres: 7,65 (average)

*All torque levels are stated gross Nm per SAE J1940 as rated by Briggs & Stratton.
 ** (Load @ 3'600 rpm). Fuel consumption is depending on engine configuration, application and operating conditions.