


COMMERCIAL · VERTICAL  
**VANGUARD™ EFI 17,90 - 20,89 GROSS kW\***



VERTICAL · VANGUARD™ · VERTICAL

<b>Engine type</b>	V-Twin, 4-stroke, air cooled, OHV (Overhead Valve)		
<b>Model number</b>	49E5	49E7	<b>49E8</b>
<b>Gross power kW (HP) @ 3'600 rpm</b>	17,90* (24,0)	19,40* (26,0)	<b>20,89* (28,0)</b>
<b>Displacement (cc)</b>	810		
<b>Cylinder</b>	Cast Iron sleeve		
<b>Bore &amp; Stroke (mm)</b>	83,8 x 73,4		
<b>Fuel tank capacity (l)</b>	NA		
<b>Oil capacity (l)</b>	1,98		
<b>Dry weight (kg)</b>	40,5		
<b>Dimensions L x W x H (mm)</b>	505 x 462 x 582		
<b>Features</b>	Oil filter, full pressure lubrication, Donaldson cyclonic air cleaner, EFI		
<b>Optional</b>	Oil Guard™, flat panel air cleaner, integrated air cleaner (available on model 49E8)		

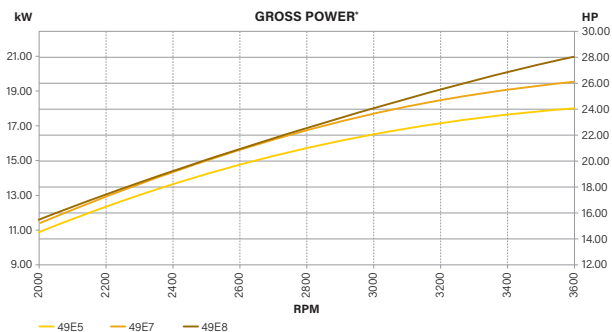

\* All power levels are stated gross kilowatts per SAE J1940 as rated by Briggs & Stratton.